


## FASTag Installation Procedure:

- Clean the Windshield Surface using water or IPA. See recommended Positions to installation of the FASTag
- Let the surface dry or IPA to vaporize.
- Remove the Release liner of Self Adhesive FASTag
- Install / Affix the self-adhesive side of FASTag at the recommended position as shown in figures below
- Press gently on the corners of the FASTag so that it comes completely in contact of windshield
- After Installing the FASTag Do not try to remove or reposition it. It may permanently damage the FASTag

## Recommended Positions of FASTag Installation on Various Vehicles:


### A. Cars and LMVs:

Following Image indicate the recommended areas for FASTAG Installation on windshields of Cars and Light Motor Vehicles

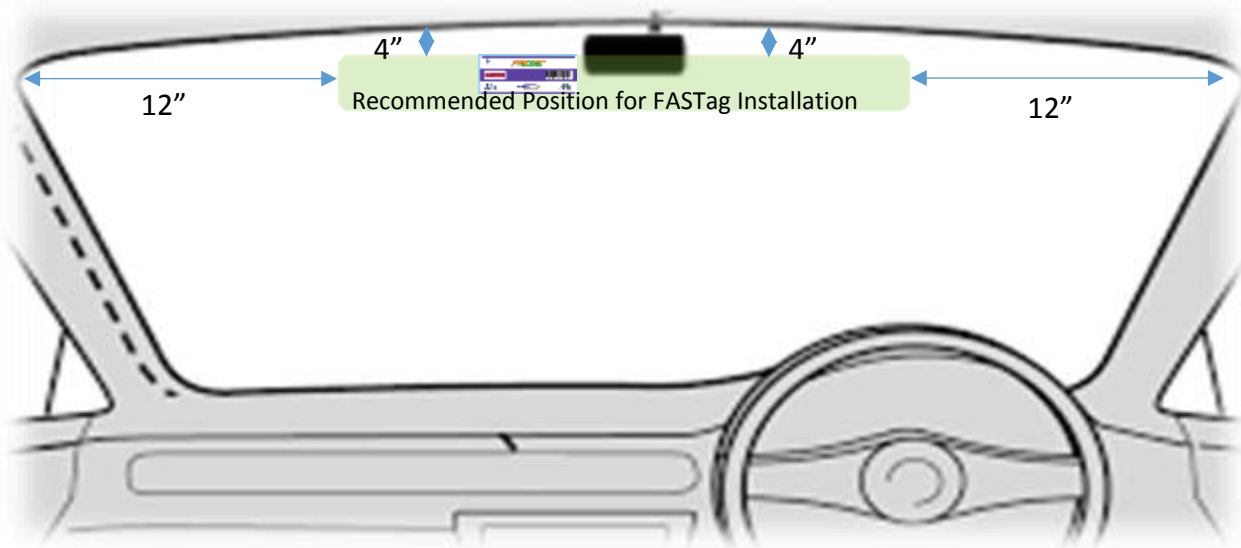

### B. Trucks with 2 Part Windshield:

Following Image indicate the recommended areas for FASTAG Installation on windshield of Trucks with 2 Part Windshields:

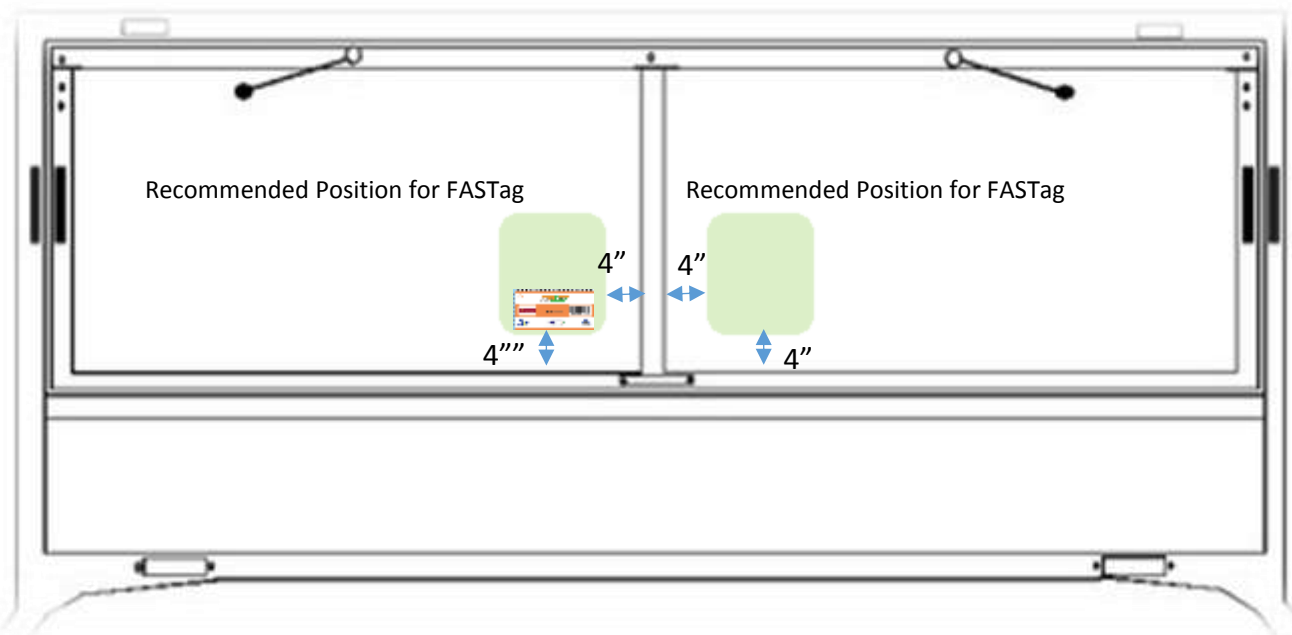

### C. Trucks with 1 Part Windshield:

Following Image indicate the recommended areas for FASTAG Installation on windshield of Trucks with 1 Part Windshields:

